




APT-CB-D-4G/WIFI-ASP-S



APT-CB-D-4G/WIFI-ASP-L

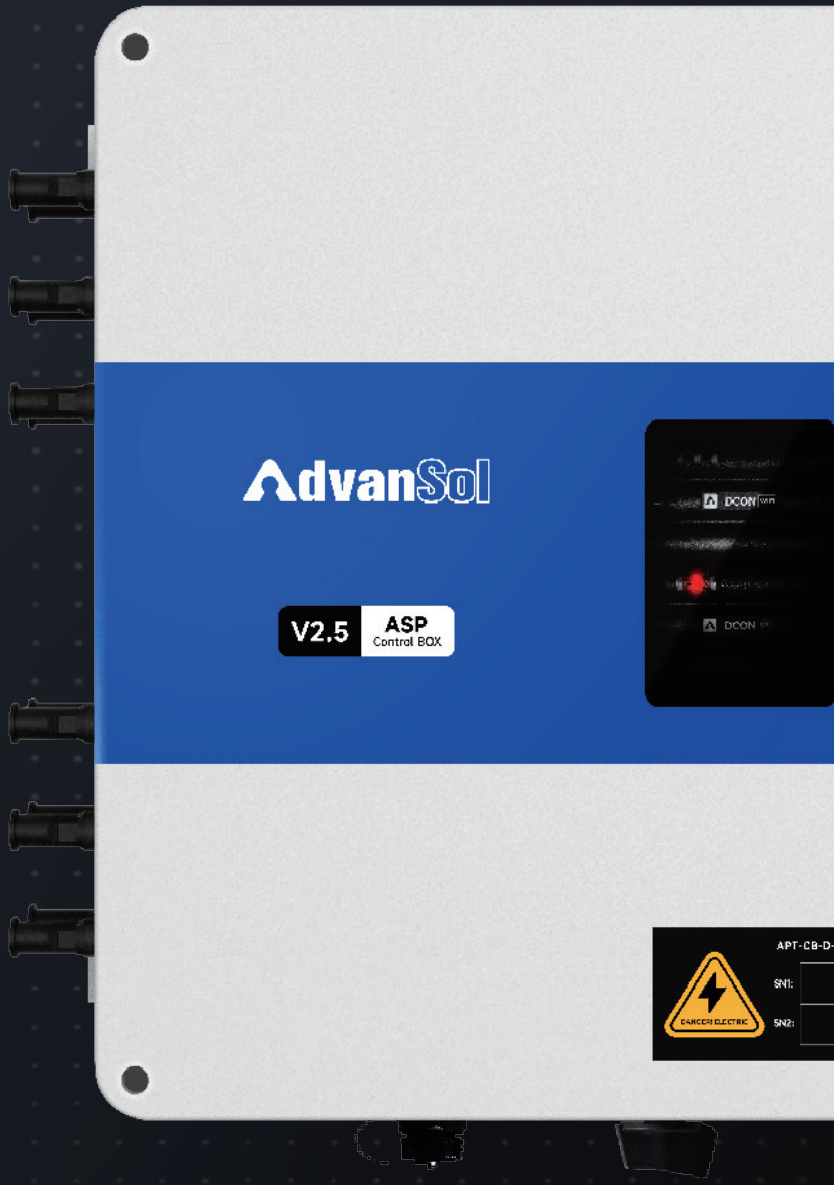

# V2.5 Control Box DCON-4G/WIFI ASP AFCI Data Controller



V2.5 Module-Master™ Solution Accessories



IP65 Protection Rating



Optional AFCI Configuration



Plug-and-Play Installation



Anti-Vibration & Impact Resistance



Integrated Design

Product Model	APT-CB-D-4G-ASP-S/L	APT-CB-D-WIFI-ASP-S/L
Data controller	DCON-4G	DCON-WIFI
Compatible micro controller	MR/MRO series	
Communication mode with Acloud	4G/LAN	WIFI/LAN
Communication mode with micro controller	Super-HPLC	
PLC Maximum Communication Distance (Along the Cable)**	Nearest micro controller $\leq$ 400m Distance between micro controllers $\leq$ 50m	
Max. number of strings supported	4 Strings (ASP-S) 12 Strings (ASP-L)	
Power supply	100-240Vac	
Communication Interval	5min	
Local Data Storage time	7Days	
Working ambient temperature	-20C-65C	
Cooling	Natural cooling	
Dimensions (LxWxD)	350*200*160 mm (ASP-S) 400*350*170 mm (ASP-L)	
Protection Rating	IP65	

Note\*\*: Max DC resistance of DC cable  $<5(\Omega/\text{km})$ , Higher resistance may affect communication distance.

